



NSW LEATHER CO. PTY LTD

www.nswleather.com

Founded in 1952 we are a third generation proudly owned Australian Company specialising in the import and export of top quality leathers and cowhide products. These are perfectly suited for the Commercial and Residential furniture, Homewares, Interior Design and Architectural Industries as well as catering for the Automotive, Marine and Aviation market.

We are Australia's largest leather distributor, delivering unsurpassed service to our customers in Australia and New Zealand for over 60 years. Our long term relationships with the best International Tanneries mean that our leather products can be trusted for their reliability, range and quality. Our tannery partners adhere to Australian Manufacturing Standards, conform to the ISO 14001 certification for environmental excellence and are committed to environmental business practises.

We are constantly sourcing new trends technologies and to offer our customers the most advanced and current leather. Talk to us about your needs as we have the capabilities to develop custom leathers for specialist projects. Our dedicated account managers provide a consultative approach to your business; we work with your vision in mind. With over 29 leather ranges, 500 colors, more than 100 finishes, we are confident we have the right leather for you. The majority of NSW Leather products are in stock and ready for immediate dispatch. Over 90% of all orders are received within 48 hours of purchase. NSW Leather has a national distribution network in every capital city and representatives in New Zealand and Singapore.

www.nswleather.com

SYDNEY HEAD OFFICE

707 Elizabeth Street
Waterloo, NSW 2017

P: +61 2 9319 2900

F: +61 2 9698 4747

E: nswl@leatherco.com.au

MELBOURNE OFFICE

107-109 Sackville Street
Collingwood, VIC 3066

P: +61 3 9417 3466

F: +61 3 9416 1514

E: nswlmel@leatherco.com.au

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

MONTE CARLO RANGE

Flamboyant and exciting is often used to describe Monte Carlo. The name certainly represents this wonderful range of leather.

The Monte Carlo range is bright and colourful with a beautiful smooth grain texture, showcasing a huge range of fashionable colours that are vibrant and modern.

Boasting extreme versatility due to its high performance finish and full bodied nature, this Italian made leather can be used in all commercial and residential high traffic applications as well as many uses in Auto, Marine and Aviation.

Specifications

Type:	Bovine
Finish:	Semi Aniline
Origin:	Italian
Size:	Average 4.8 sq. metres
Thickness:	1.2 / 1.4mm
Application:	Commercial and Residential, Auto, Marine and Aviation

www.nswleather.com
MONTE CARLO RANGE

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au



MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: Monte Carlo

Technical Properties

Description	Normative	Secured
Flexing Endurance Method	ISO 5402	> 50,000 cycles
Colour fastness to light Method	ISO 105 B02	> = 6 Blu Scale
Colour fastness to and fro rubbing	EN ISO 11640	Dry 1000 > =4 Wet 250 > =4 Sweat 250 > =4
Sweat Alkaline Solution	EN ISO 11641	Ph 8
Tear Strength, Single edge Tear Method	EN ISO 3377-1	> = 20N
Finish Adhesion Method	EN ISO 11644	> = 20 N/ 10mm
Determination of pH Difference figure (only for pH < 4)	EN ISO 4045	> = 3.5 < = 0.7
Fire Rating	EN ISO 1021-1	No ignition
Care Instructions	<ul style="list-style-type: none"> > Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects 	


MONTE CARLO RANGE

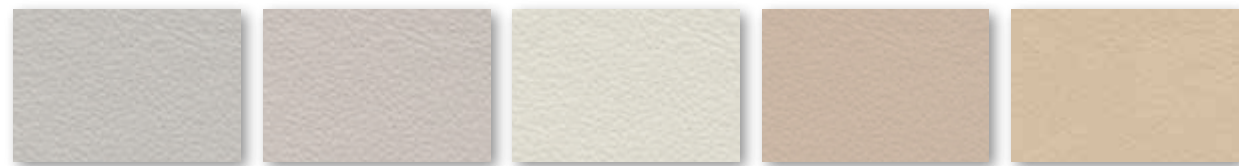

2018 2124 2044 2260 2134




2116 2114 2118 2048 2100

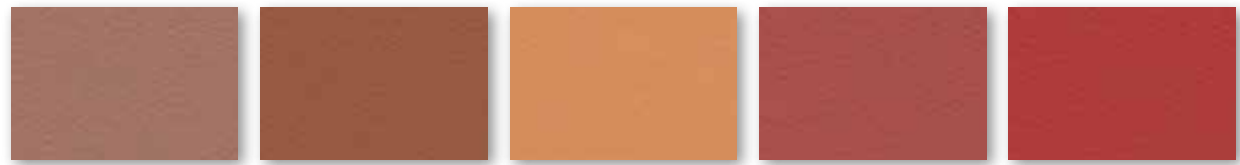

2050 2020 2070 2202 2112




2122 2204 2026 2108 2082

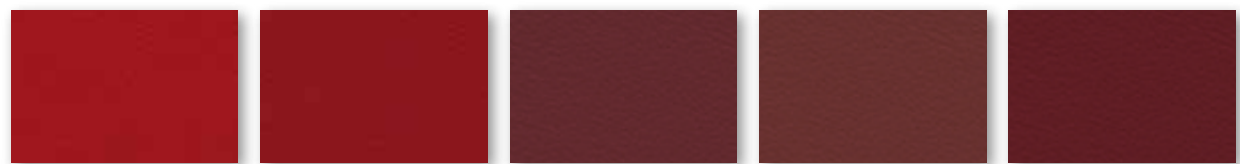


2034 2206 2120 2028 2080



2032 2088 2250 2102 2252

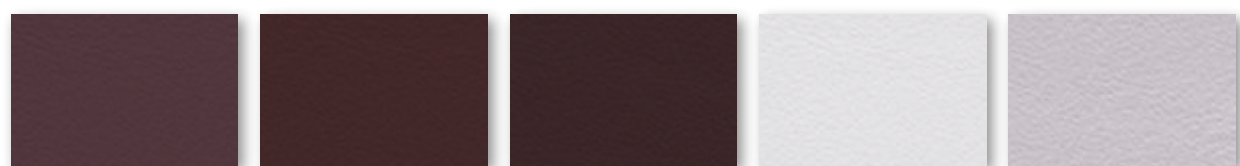

2090 2110 2254 2248 2256

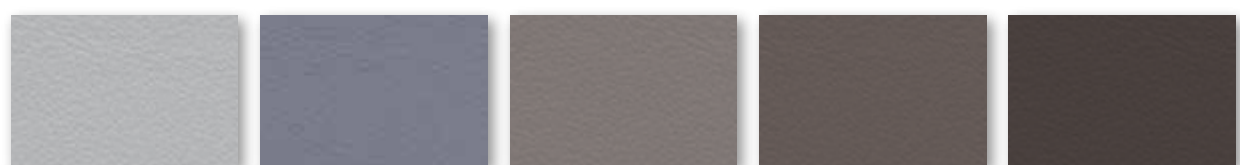


2128 2074 2072 2258 2076



2106 2210 2212 2054 2214




2064 2216 2066 2038 2068

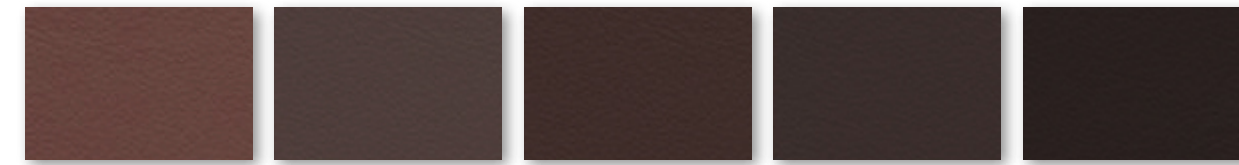


2060 2062 2126 2040 2002



2138 2222 2232 2230 2228

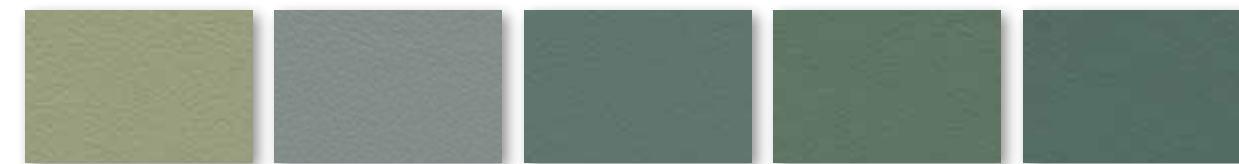


2056 2036 2016 2096 2014

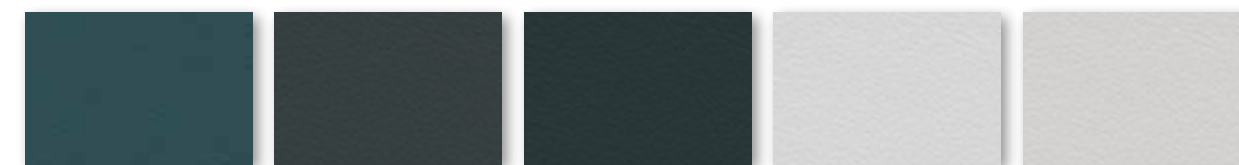

2012 2098 2046 2132 2234



2130 2236 2140 2000 2240

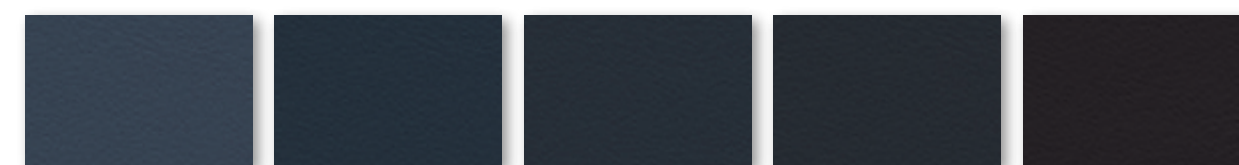

2242 2008 2058 2244 2006

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

SOVEREIGN RANGE

This range of leather is a beautiful soft tanned, waxy Semi Aniline with a natural appearance. Produced on best quality European hides.

Our Sovereign is available in many fashionable colours all of which are high quality, elegant and luxurious. This leather is full bodied thus giving a rich, supple feel.

Because of the type of finishing, the leather is very durable and ideally suitable for use in high traffic areas, heavy use entertainment, office and hospitality applications.

Specifications

Type:	Natural Grain Bovine
Finish:	Semi Aniline
Origin:	Italian
Size:	Average 4.8 sq. metres
Thickness:	1.2 / 1.4mm
Application:	Commercial and Residential
Certification:	IMO 652 AS 1530.30

www.nswleather.com SOVEREIGN RANGE

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: Sovereign

Technical Properties

Description	Normative	Secured
Flexing Endurance	ISO 5402	> 50,000 cycles
Colour fastness to light	ISO 105 B02	> = 4 Blu Scale
Colour fastness to and fro rubbing	EN ISO 11640	Dry 500 > = 4 Wet 80 > = 4 Sweat 50 > = 4
Sweat Alcaline Solution	EN ISO 11641	Ph 8
Tear Strength, Single edge Tear	EN ISO 3377-1	> = 20N
Finish Adhesion	EN ISO 11644	> = 2.5 N/Cm
Determination of pH Difference figure (only for pH < 4)	EN ISO 4045	> = 3.5 < = 0.7
Fire Rating	IMO 652 AS 1530.30 EN ISO 1021-1 EN ISO 1021-2	Pass Pass
Care Instructions	<ul style="list-style-type: none"> > Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects 	

SOVEREIGN RANGE



SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

CASABLANCA RANGE

This range of leather is a beautiful soft tanned Semi Aniline. Produced on best quality European hides, the Casablanca has a soft waxy touch.

When manufactured it gives a very smooth and silky look.

Casablanca is a very durable leather which is good for high traffic residential and commercial applications.

Specifications

Type:	Natural Grain Bovine
Finish:	Semi Aniline
Origin:	Italian
Size:	Average 4.8 sq. metres
Thickness:	0.9 / 1.0mm
Application:	Commercial and Domestic
Certification:	QA Certified Leather

www.nswleather.com CASABLANCA RANGE

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: Casablanca

Technical Properties

Description	Normative	Secured
Flexing Endurance	ISO 5402	> 50,000 cycles
Colour fastness to light	ISO 105 B02	> = 6 Blu Scale
Colour fastness to and fro rubbing	EN ISO 11640	Dry 500 > =4 Wet 80 > =4 Sweat 50 > =4
Sweat Alcaline Solution	EN ISO 11641	Ph 8
Tear Strength, Single edge Tear	EN ISO 3377-1	> = 20N
Finish Adhesion	EN ISO 11644	> = 2.5 N/Cm
Determination of pH Difference figure (only for pH < 4)	EN ISO 4045	> = 3.5 < = 0.7
Fire Rating	EN ISO 1021-1 EN ISO 1021-2	Pass Pass
Care Instructions	> Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects	

CASABLANCA RANGE

* Indicates INDENT colours



Snow Mink Champagne Sand Stucco




Pannacotta Pewter Topaz Mushroom Moss



Pony Coco Mocha Marocco Lux Cognac Lux




Tangerine Chilli Rouge Lux Merlot Pinot Lux

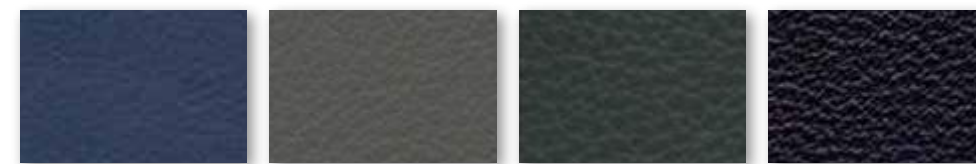

Ocean Steel Thunder Nero



*Latte 635 *Vaniglia 602 *Beige 604 *Crema 605 *Cipria 606

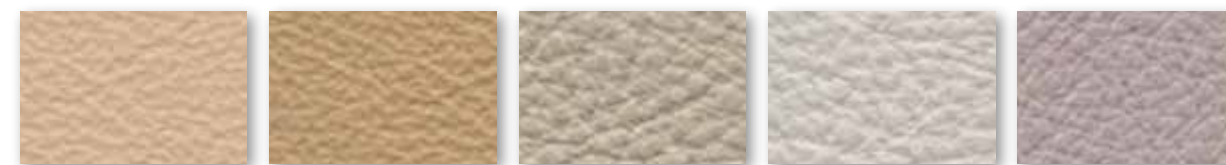

*Siena 638 *Sabbia 628 *Stone 629 *Smoke 639 *Tortora 659




*Wood 609 *Nocciola 607 *Marrone 608 *Fango 627 *Rosa Antico 651



*Giallo 620 *Giallino 619 *Arancio 618 *Begonia 617 *Antic 616




*Cotto 656 *Mattone 613 *Rosso 614 *Bordeaux 615 *Amaranto 655

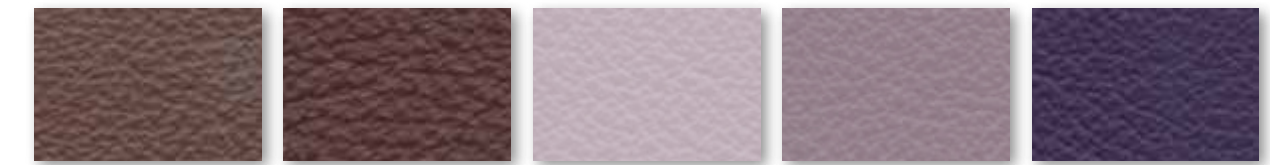


*Castagna 612 *Mogano 610 *Ombretto 652 *Lilla 650 *Viola 633



*Lotus 641 *Green 631 *Verde 621 *Foresta 658 *Pino 653

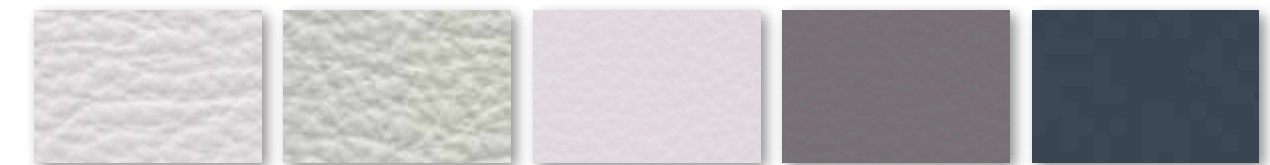

*Cielo 649 *Acciaio 630 *Cinder 648 *Asfalto 660 *Avio 643



*Testa Moro 611

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au








MILLENNIUM RANGE

This range of leather has a corrected grain with a pigmented finish and a fine embossed effect.

Our Millennium is specially tanned to produce a very soft, mellow feel and silky touch. This feature allows the leather to feel like a full grain leather and this is unique to our corrected grain range.

Because of the type of finishing, the leather is very durable and good for high traffic residential and commercial applications.

Specifications

 Type:	Corrected Bovine
 Finish:	Pigmented
 Origin:	Italian
 Size:	Average 4.8 sq. metres
 Thickness:	0.9 / 1.0mm
 Application:	Commercial and Domestic
 Certification:	IMO 652 AS 1530.30 QA Certified Leather

www.nswleather.com
MILLENNIUM RANGE

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au


Technical data article: Millennium

Technical Properties

Description	Normative	Secured
Flexing Endurance	ISO 5402	> 50,000 cycles
Colour fastness to light	ISO 105 B02	> = 5 Blu Scale
Colour fastness to and fro rubbing	EN ISO 11640	Dry 500 > =4 Wet 80 > =4 Sweat 50 > =4
Sweat Alcaline Solution	EN ISO 11641	Ph 8
Tear Strength, Single edge Tear	EN ISO 3377-1	> = 20N
Finish Adhesion	EN ISO 11644	> = 2.5 N/Cm
Determination of pH Difference figure (only for pH < 4)	EN ISO 4045	> = 3.5 < = 0.7
Fire Rating	IMO 652 AS 1530.30 EN ISO 1021-1 EN ISO 1021-2	Pass Pass
Care Instructions	<ul style="list-style-type: none"> > Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects 	

MILLENNIUM RANGE

* Indicates INDENT colours

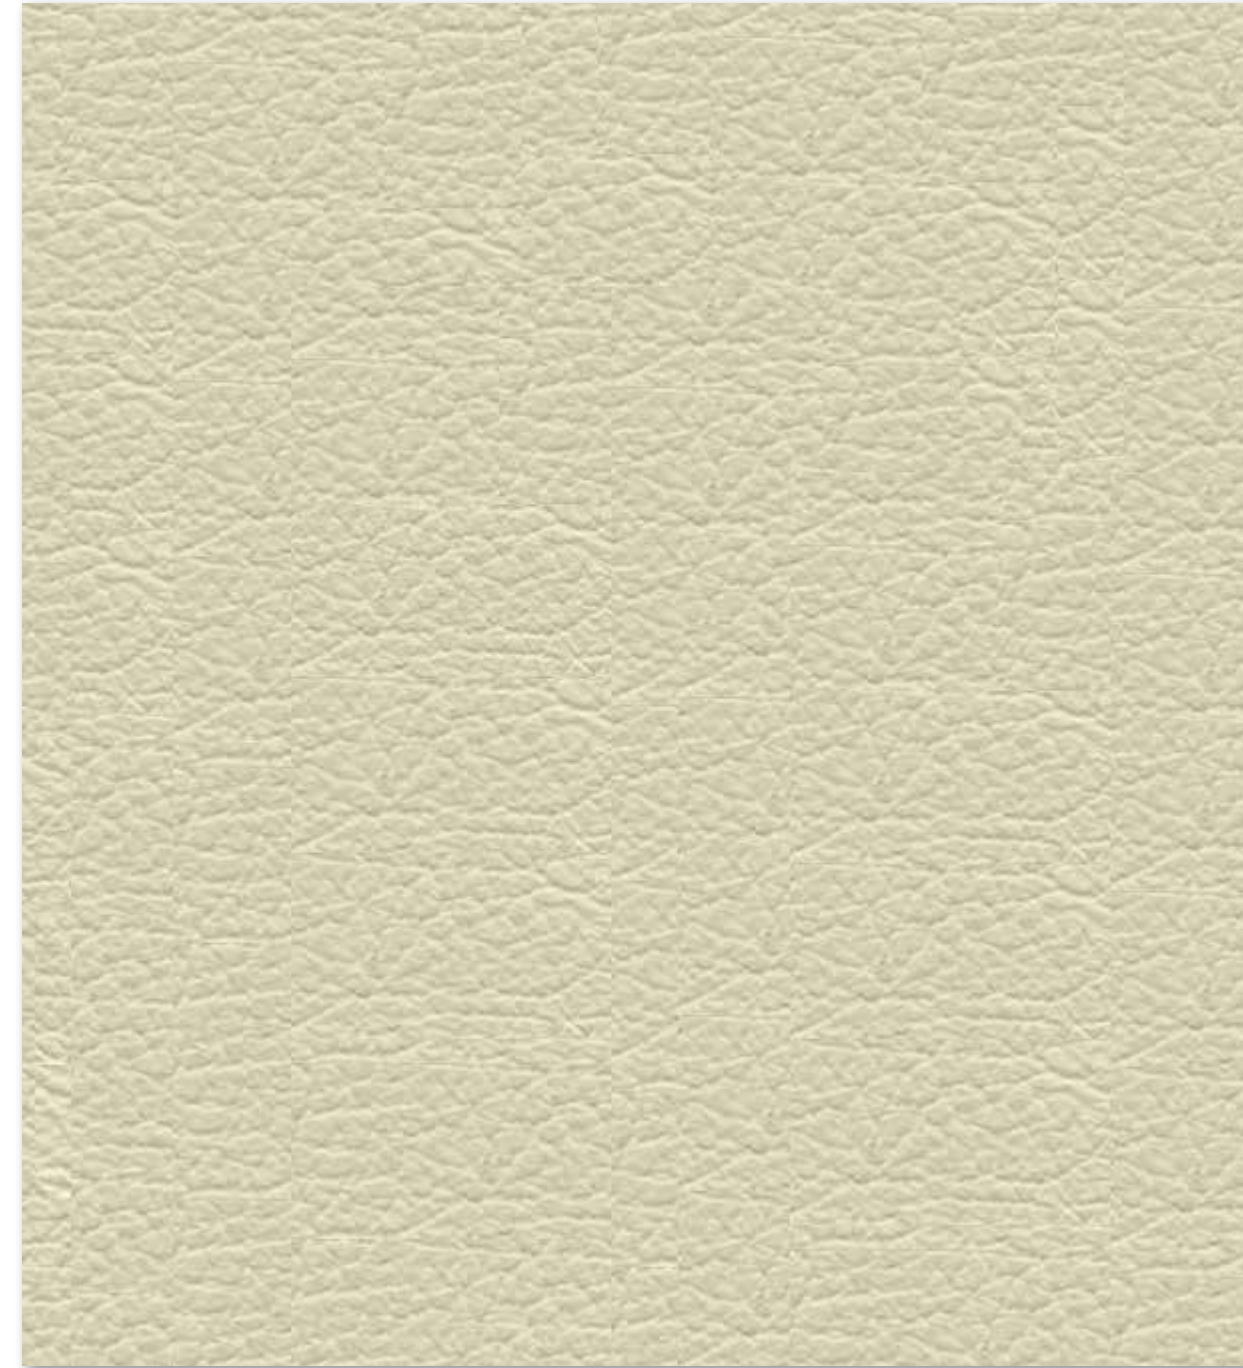

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017

P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066

P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: **Laguna**

Technical Properties

Description	Normative	Secured
Flexing Endurance	ISO 5402	> 50,000 cycles
Colour fastness to light	ISO 105 B02	> = 2/3 Blu Scale
Colour fastness to and fro rubbing	EN ISO 11640	Dry 500 > =3 Wet 80 > =3 Sweat 50 > =2
Sweat Alkaline Solution	EN ISO 11641	Ph 8
Tear Strength, Single edge Tear	EN ISO 3377-1	> = 20N
Finish Adhesion	EN ISO 11644	> = 2.5 N/Cm
Determination of pH Difference figure (only for pH < 4)	EN ISO 4045	> = 3.5 < = 0.7
Fire Rating	EN ISO 1021-1 EN ISO 1021-2	Pass Pass
Care Instructions	> Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects	

Technical data article: **Sundance**

Technical Properties

Description	Minimum Value	Method
Flexometer	20,000 Rpm	IUP 20, DIN 53340
Wet Rubbing	20 cycles - 5 grey scale	IUF 450, DIN 53339 / DIN 54002
Dry Rubbing	50 cycles - 5 grey scale	IUF 450, DIN 53339 / DIN 54002
Perspiration Rubbing	20 cycles - 5 grey scale	IUF 450, DIN 53339 / DIN 54002
Light Fastness	3-5 (depends on the colours)	IUF 402, DIN 54004
Tear Strength	40 N/mm	DIN 53329
Water Spotting	4	IUF 420
PH	4,3	IUC 11
Fire Rating	AS 1530.30 EN ISO 1021-1 EN ISO 1021-2 AS/NZ 3837-1998	Pass Pass

Other Technical Requirements to which we comply

- According to BS 5852 Part 1 Schedule 4 & 5 as per the 1988 n^o 1324 Consumer Protection - The Furniture and Furnishing (Fire) (Safety) Regulations 1988.
- According to California bulletin n^o 116
- According to ISO 8191-1 (The Cigarette Test)

LAGUNA RANGE

This range of leathers is a very unique Aniline with an aged pull-up effect.

This tannage gives the leather a real Rustic aged look and this type of finish is very fashionable. This range is produced on top quality European hides.

The Laguna is perfect for Domestic and Commercial applications.

Specifications

Type:	Bovine
Finish:	Aniline Pull Up
Origin:	Italian
Size:	Average 4.8 sq. metres
Thickness:	0.9 / 1.1mm
Application:	Commercial and Domestic
Certification:	QA Certified Leather

SUNDANCE RANGE

Sundance is a beautiful rustic full grain leather. Finished with oils and waxes, this range has a very natural appeal.

This tannage creates a subtle pull up effect giving it a warm 2-tone Aniline appearance.

Sundance is produced on best quality European hides. Natural markings and defects may be seen and these hallmarks are part of the character of the leather.

Specifications

Type:	Natural Full Grain Bovine
Finish:	Full Aniline
Origin:	Italian
Size:	Average 4.8 sq. metres
Thickness:	0.9 / 1.0mm
Application:	Commercial and Residential
Certification:	AS/NZ 3837-1998 AS 1530.30

www.nswleather.com

www.nswleather.com

LAGUNA & SUNDANCE RANGES

LAGUNA




Oak




Cafe



Cypress

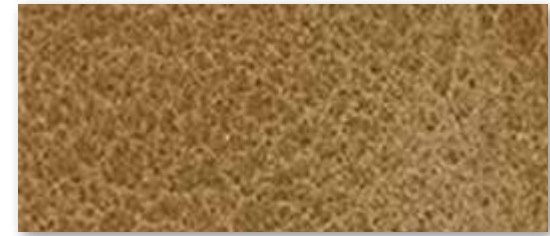

*Biscotto 2002

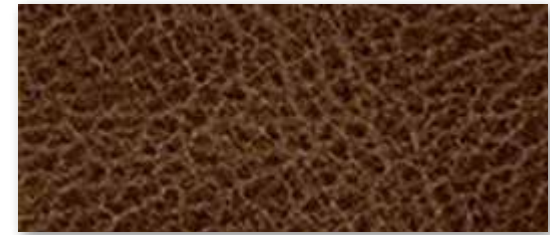

*Brown 2006



*Maple 2005

* Indicates INDENT colours



Cedar




Hermitage



Blackwood



*Cobblestone 2001

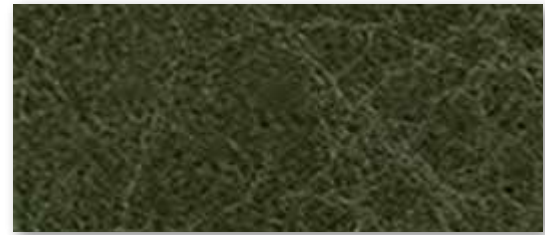

*Green 2003

LAGUNA



SUNDANCE



SUNDANCE



Riesling



Brindle



Bark



Cuba




Cherry



Nero



Sorba

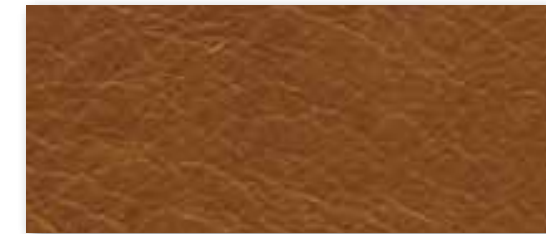

Driftwood



Amazon



Haiti



Ash

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017

P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066

P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: **Regal**

Technical Properties

Description	Minimum Value	Method
Flexing Endurance	ISO 5402	> 50,000 cycles
Colour fastness to light	ISO 105 B02	> = 2 Blu Scale
Colour fastness to and fro rubbing	EN ISO 11640	Dry 500 > =4 Wet 80 > =4 Sweat 50 > =4
Sweat Alkaline Solution	EN ISO 11641	Ph 8
Tear Strength, Single edge Tear	EN ISO 3377-1	> = 20N
Finish Adhesion	EN ISO 11644	> = 2.5 N/Cm
Determination of pH Difference figure (only for pH < 4)	EN ISO 4045	> = 3.5 < = 0.7
Fire Rating	EN ISO 1021-1 EN ISO 1021-2	Pass Pass
Care Instructions	> Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects	

Technical data article: **Marrakesh**

Marrakesh is an aniline article, full grain and with a vegetable retannage. It has a transparent and bright finish that gives a very natural aspect. This makes apparent all the special characteristics of the leather.

Technical Properties

Property	Minimum Value	Method
Flexometer	20,000 Rpm	IUP 20, DIN 53340
Wet Rubbing	20 cycles - 5 grey scale	IUF 450, DIN 53339 / DIN 54002
Dry Rubbing	50 cycles - 5 grey scale	IUF 450, DIN 53339 / DIN 54002
Perspiration Rubbing	20 cycles - 5 grey scale	IUF 450, DIN 53339 / DIN 54002
Light Fastness	3-5 (depends on the colours)	IUF 402, DIN 54004
Tear Strength	40 N/mm	DIN 53329
Water Spotting	4	ISO 4020
PH	4,3	IUC 11

Other Technical Requirements to which we comply

- According to BS 5852 Part 1 Schedule 4 & 5 as per the 1988 n^o 1324 Consumer Protection - The Furniture and Furnishing (Fire) (Safety) Regulations 1988.
- According to California bulletin n^o 116
- According to ISO 8191-1 (The Cigarette Test)

REGAL RANGE

This range of leather is specially finished using vacuum driers together with oils and waxes. This treatment gives the leather its unique two-tone finish and a 'pull up' effect and provides this article with prestige and charm.

Regal is made on full grain best quality European hides with a waxy smooth handle and a bright aniline appearance.

This aniline finish means the hides natural markings and defects may be seen and this is understood as part of the character of the leather.

Specifications

- 🐾 Type: Natural Full Grain Bovine
- 🐾 Finish: Full Aniline Pull Up
- 🐾 Origin: Italian
- 🐾 Size: Average 4.8 sq. metres
- 🐾 Thickness: 0.9 / 1.1mm
- 🐾 Application: Commercial and Residential

MARRAKESH RANGE

This range of leather is a very naturally finished, full aniline, transparent upholstery leather. Marrakesh is made on Full Grain best quality European hides.

This natural finish means the hides natural markings and defects may be seen and this is understood as part of the character of the leather.

The Marrakesh provides a look of natural beauty unsurpassed in the Australian market.

Specifications


- 🐾 Type: Natural Full Grain Bovine
- 🐾 Finish: Drum Dyed Full Aniline
- 🐾 Origin: European
- 🐾 Size: Average 4.5 sq. metres
- 🐾 Thickness: 0.9 / 1.1mm
- 🐾 Application: Domestic and Commercial

WWW.NSWLEATHER.COM

WWW.NSWLEATHER.COM

REGAL & MARRAKESH RANGES


REGAL

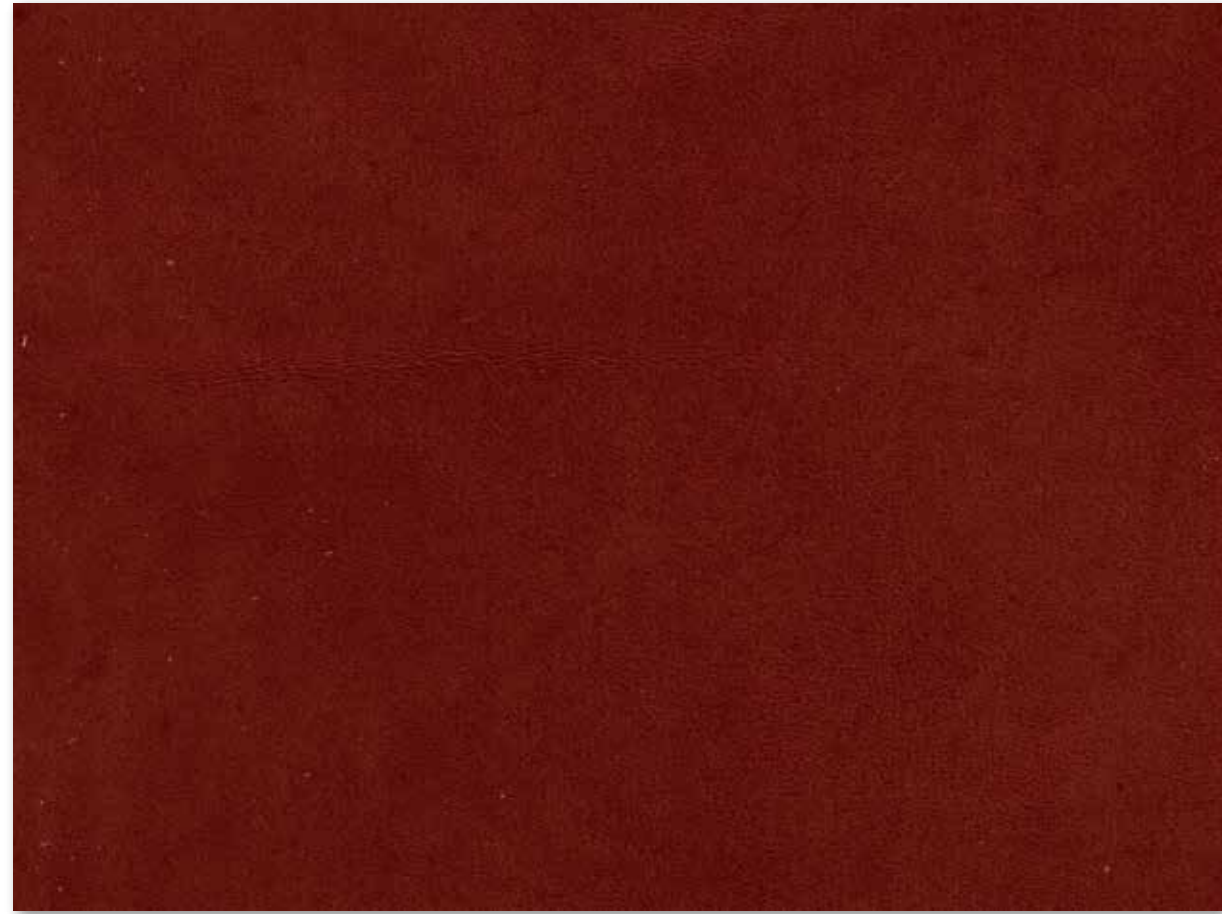

REGAL



Red 803

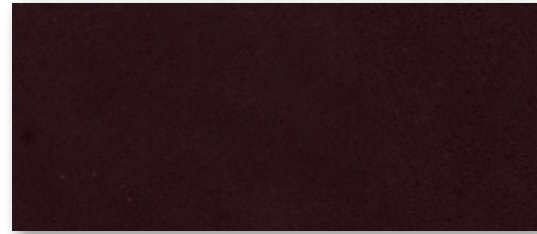

Burgundy 808



Ebano 811



Rust 802





Mogano 804



Dark Brown 806

MARRAKESH

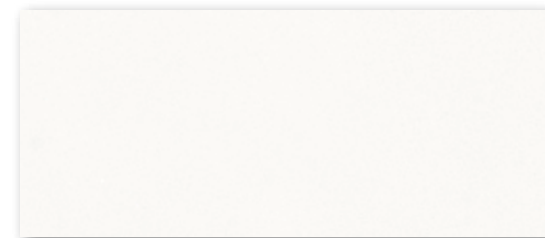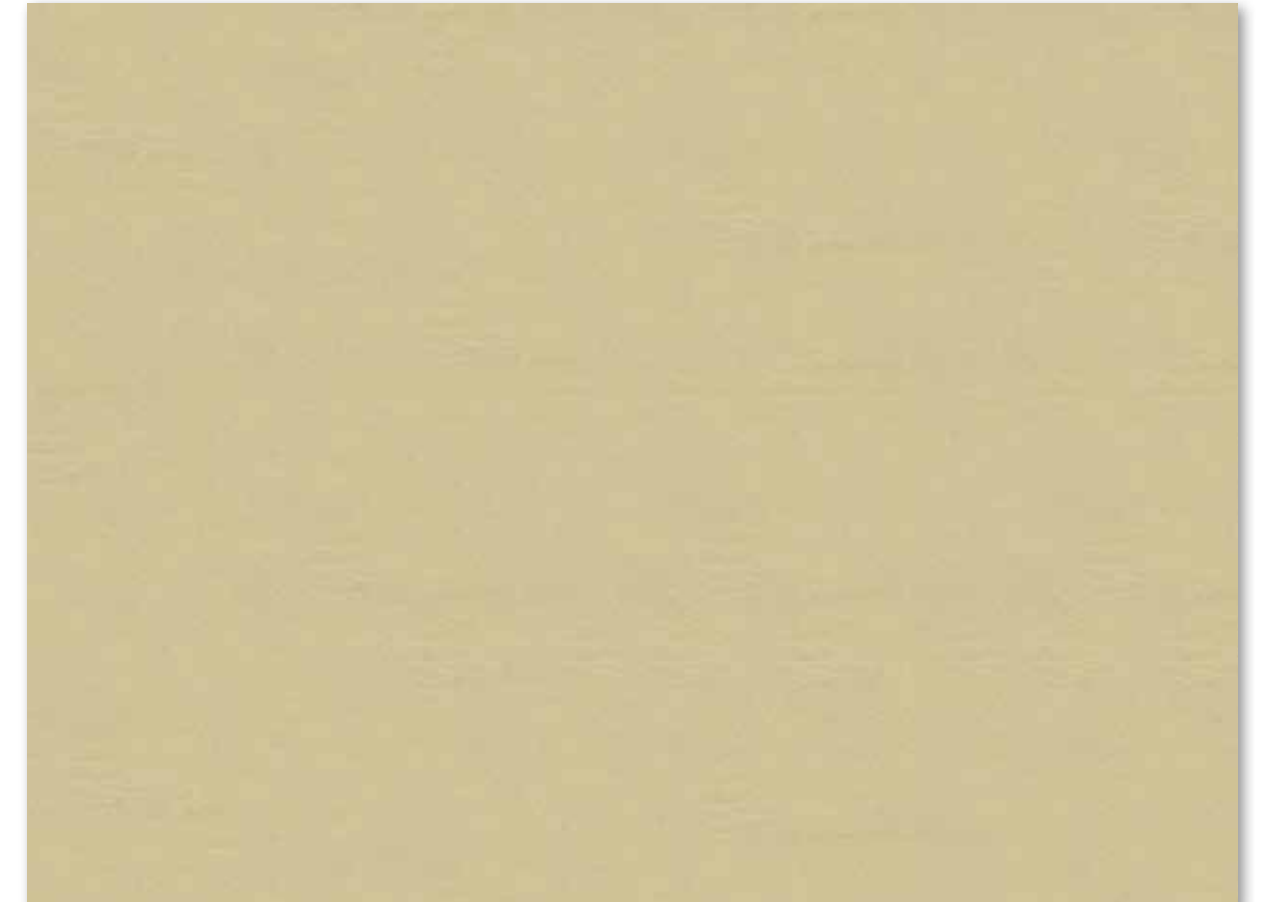

Bianco 818



Perla 817



Baobab 810



Jade 822



Jamaica



Macadamia




Sand 814



Chestnut 805



Green 812

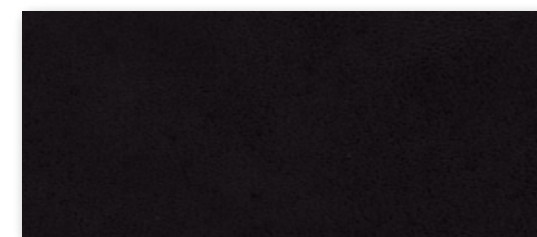

Nero 807



Saddle




Vintage



Arancio 809



Siena 801

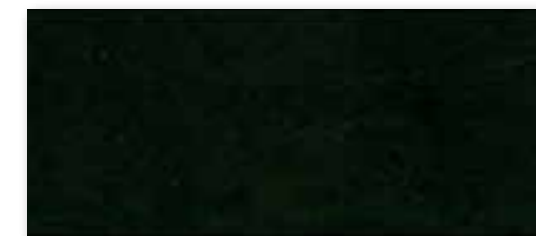

Ebony



Mahogany

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au








STINGRAY RANGE

The Stingray range is a superb full grain leather with a semi aniline finish and an embossed print that imitates the exotic skin of a stingray.

The beautiful 2 tone appearance is achieved by tipping the grain by hand and this gives the leather a very elegant and exclusive look and this finish lends the article a very fashionable and jovial air.

This leather is produced on best quality European hides, is highly resistant and is suitable for all heavy traffic conditions both commercial and residential.

Specifications

 Type:	Full Grain Bovine
 Finish:	Semi Aniline
 Origin:	European
 Size:	Average 4.5 sq. metres
 Thickness:	1.2 / 1.4mm
 Application:	Commercial and Residential
 Certification:	AS 1530.30

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: **Stingray**

STINGRAY is a beautiful full grain article with a semi aniline finish and a print which imitates the exotic skin of a stingray. Its tipped grain done by hand which gives the leather a very elegant and exclusive look while the discrete brilliance of the finish lends the article a very contemporary and jovial air.

This leather is produced on best quality European hides, is highly resistant and is suitable for all heavy traffic conditions both commercial and residential.

Technical Properties

Description	Minimum Value	Method
Flexometer	> = 20,000 flexes	DIN EN 13334
Colour fastness to and fro rubbing	Wet 80 > =5	DIN EN ISO 11640
	Dry 50 > =5	DIN EN ISO 11640
Colour fastness to light	> = 5 Blue Scale	EN ISO 105 - B02
Tear Strength	> = 25N	DIN 53329
Finish Adhesion	EN ISO 11644	> = 2.5 N/Cm
Fire Rating	AS 1530.30	Pass Pass
	EN ISO 1021-1	
	EN ISO 1021-2	
Care Instructions	> Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects	

Other Technical Requirements to which we comply

- According to California bulletin n° 116
- According to ISO 8191-1 & 2 (Butane Gas Flame and Cigarette Test)
- In accordance to the limited values of PCP, Chrome VI, aromatic amines indicated in the European regulation 2002/61/CE
- In accordance to the European regulation 76/69/ECC


STINGRAY




STINGRAY




Whipped Creme

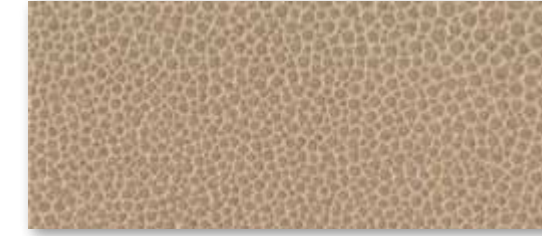


Truffle

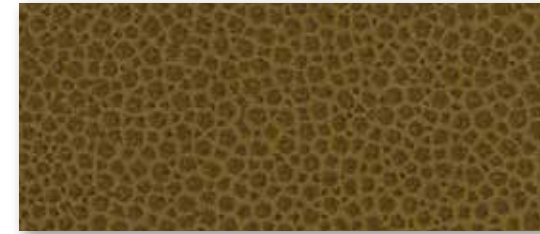

Caramel

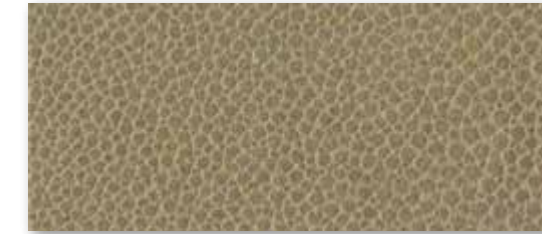

Spearmint

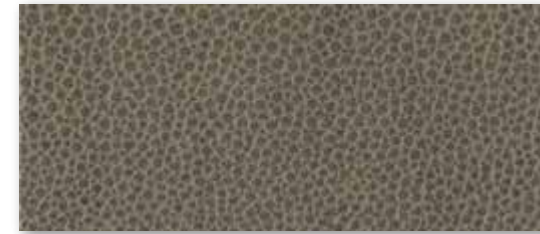

Bon Bon



Amaretto




Toffee



Candy



Fudge

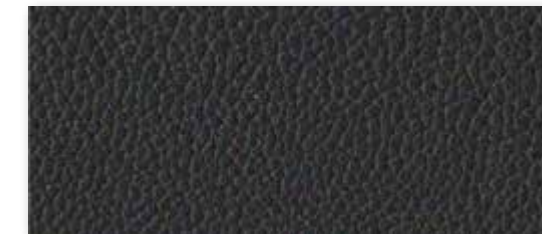

Licorice

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

XTREME RANGE

Xtreme Outdoor is the result of years of research and development by top Austrian tannery Boxmark. Produced on best quality Western European Bull hides this leather has countless applications for both indoor and outdoor.








Xtreme is an extremely hard wearing and water resistant leather and is easily resistant to harm from such elements as dirt, water, chlorine, disinfectants, mould, oil, alcohol and UV radiation as well as other weather conditions.

With maximum values for its technical properties, Xtreme's appeal lies in its tactile quality, elegance and natural appearance.

This leather can be utilised in such applications and areas as Hotels, Restaurants (indoor and outdoor), Spas, Gyms, Conservatories, Terraces, Ships/Ferries/Boats/Yachts, Airports, Harbours, Trains, Aeroplanes, Caravans, Buses, Public Seating Areas, Museums, Theatres, Sports Stadiums, Hospitals, Nursing Homes, Aged Care Facilities, Sanitary Facilities or any other application for Commercial and Residential use.

Xtreme has the following characteristics which allow the above applications: antibacterial, antimicrobial, mildew resistant, oil, water and alcohol resistant, sweat resistant, easy to clean, disinfection agent resistant, lightfast, highly abrasion resistant, highly stretch and tear resistant, break resistant even at freezing temperatures.

Specifications

-  Type: Natural Grain Bovine
-  Finish: Pigmented
-  Origin: Austrian
-  Size: 5.3 sq. metres
-  Thickness: 1.3 mm / 1.4mm
-  Application: Commercial and Residential
Indoor & Outdoor
-  Certification: IMO 652
AS 1530.3

www.nswleather.com XTREME RANGE

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: Xtreme


Technical Properties

Description	Normative	Secured
Tensile Strength	DIN EN ISO 1421	Passed
Flexing Endurance	DIN 53351	> 30,000 cycles
Cold Crack Resistance	DIN EN 1876-1	@ 10°C
Sweat Resistance	DIN EN ISO 105-E04	Passed
Seawater Resistance	DIN EN ISO 105-E02	Passed
Rub Fastness	DIN EN ISO 105-X12	Passed
Martindale Rub Resistance	DIN EN ISO 5470-2	Passed
Light Fastness	DIN EN ISO 105-B02	Passed
Soiling Behaviour	ISO 26082	Passed
Water/Alcohol Droplet Test	Excellent	Passed
Oil Repellence Test	Excellent	Passed
Adhesion	IUF 470 / ISO 11644	> 2.5 N/10mm
Antibacterial	-	> 99.9%
Low Flammability	-	-
Care Instructions	<ul style="list-style-type: none"> > Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects 	

Other Technical Requirements to which we comply

- DIN EN 1021 part 1+2; ISO 8191-1; BS 5852 source 3; California TB 117 (Draft 02/2002)

XTREME RANGE

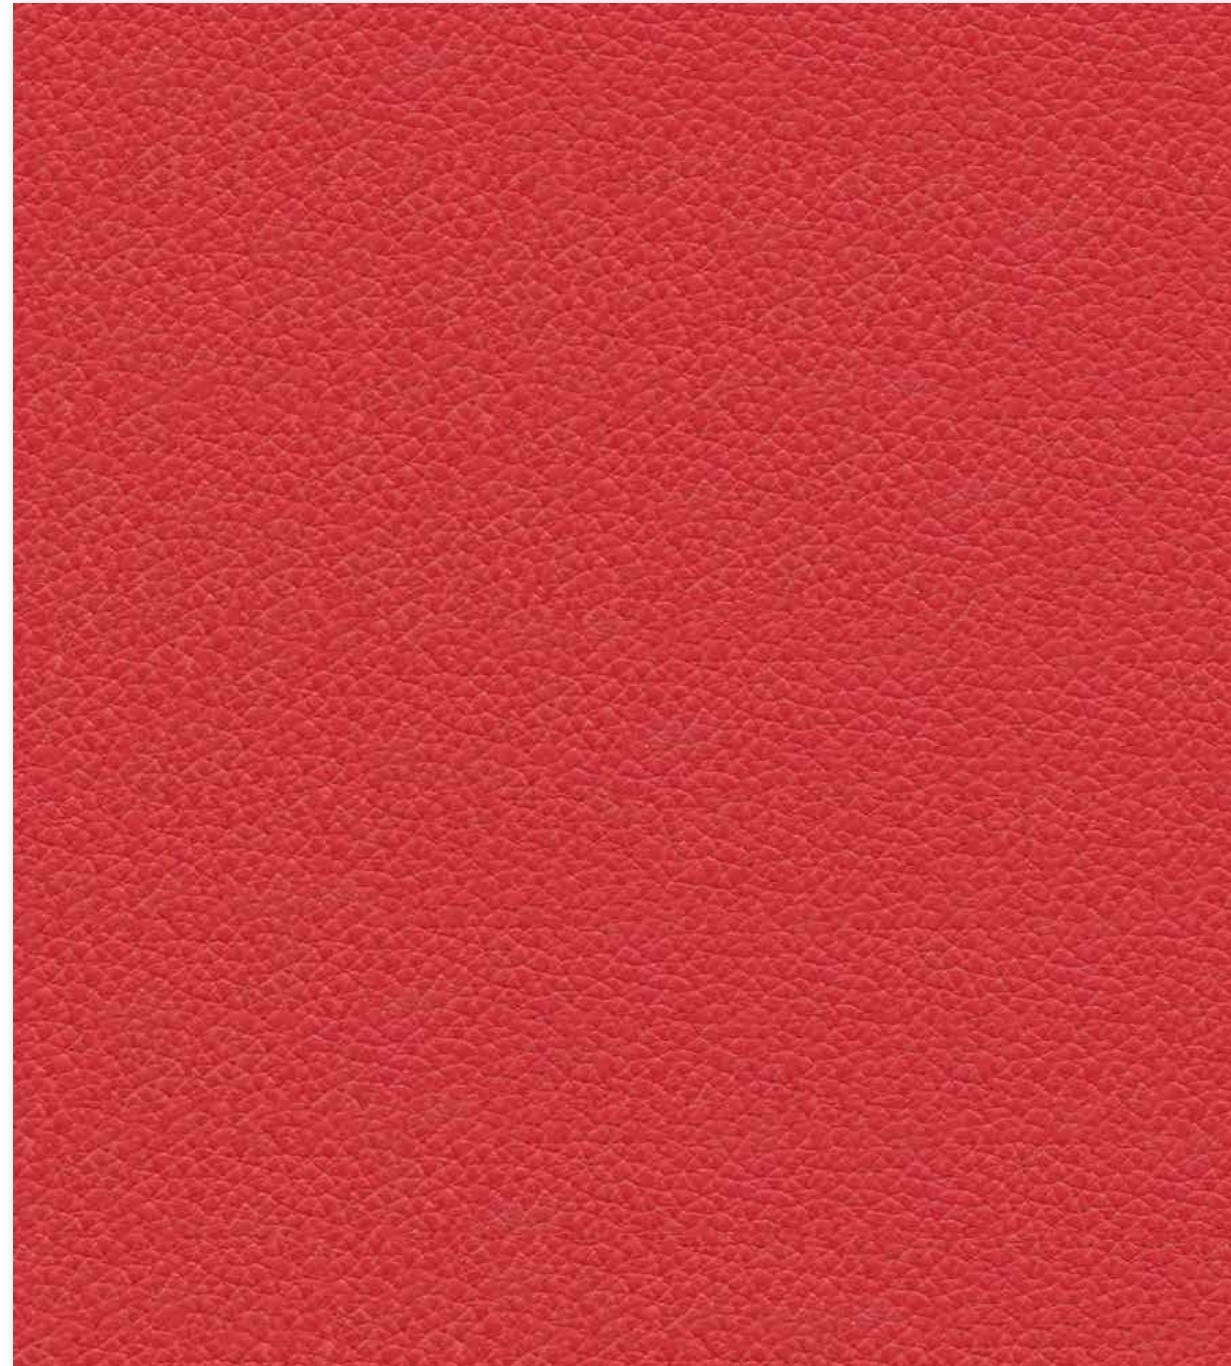

29130 Capri



29120 Fiji



29160 Corfu



29176 Hawaii



69200 Maldives



89180 Crete



69130 Madiera



39177 Mykonos



69140 Bali



39120 Antigua



19120 Iceland



19172 Sal



19130 Samos



19124 Mahe



79162 Cayman



19163 Malta



19160 Sylt



19161 Kos



19167 Maui



19171 Honolulu



89112 Cuba



79134 Naxos




89170 Samoa



79173 Sumatra



49115 Tonga



89174 Trinidad



89135 Haiti




79164 Lanzarote




89116 Java




99123 Fogo



39168 Rhodes



39178 Grenada



39165 Martinique



39114 Tobago



59122 Elba



59138 Corsica



59170 Jamaica



59130 Barbados



59140 Aruba

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

ROYAL AVIATOR RANGE

The Royal Aviator range is a sophisticated leather developed specifically for the aircraft industry and is manufactured on top quality European hides.

This leather complies to the full requirements of FAR 25.853, the fireproof normative for Aircraft interiors. For more information please click here to download a copy of the AWTA lab test result for the FAR 25.853 certification.

These high industry specifications also make the Royal Aviator range perfectly suited for the automotive industry as well.

Royal Aviator is available in 57 attractive commercial colours. Certification is available with each delivery if required.

Specifications

- Type: Natural Grain Embossed Bovine
- Finish: Semi Aniline
- Origin: European
- Size: Average 5.3 sq. metres
- Thickness: 1.3 / 1.4mm
- Application: Aviation, Commercial & Domestic, Automotive, Marine & Residential
- Certification: FAR 25.853 Certified

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: Royal Aviator

Technical Properties

Description	Method	Minimum Value
Colour Fastness to rubbing Dry 1000 Cycles, Wet 500 Cycles, Perspiration (ISO11641) 100 Cycles Evaluation ISO 105 A - 03	ISO 11640	> = 4 > = 4 > = 4
Colour Fastness to light Exposure Conditions N 3 (table 3) apparatus Type C (Atlas CI 3000+), Irradiance 1.2 W.m ² at 420nm, Exposure Method 3, 1 Exposure 80 hours (345 KJ/m ² at 420nm)	ISO 105 B-06	> = 6
Cold Crack Resistance of Finish (@ 30°C)	ISO 17233	No Cracks
Finish Adhesion	ISO 11644	> = 5 N/Cm (Dry) > = 3 N/Cm (Wet)
Burning Behaviour	ISO 3795	< = 75mm/min
Flexing Endurance	ISO 5402	100,000 Cycles
Tear Strength	ISO 3377-1	> = 30 N
Fogging Test Gravimetric Method, point 8.5.3	ISO 6452	< = 5 mg
Migration Staining	ISO 15701	> = 4
Tensile Strength and Elongation	ISO 3376	> = 12 N/mm ² 35 - 60%
Colour fastness to water spotting	ISO 15700	Passed
Abrasion Wheels CS 10, Load 500g	ISO 5470	2,000 Cycles
Artificial Ageing 168 hours, 38°C 98% RH 168 hours, 93°C	-	> = 4/5 > = 4/5
Dry Heat Shrinkage 168 hours, 93°C	-	< = 5%
Care Instructions	<ul style="list-style-type: none"> > Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects 	

ROYAL AVAITOR RANGE




59138 Blue 99123 Black 59170 Deep Sea 59136 Navy 59120 Azure



59122 French Blue 59140 Sky 59121 Steel 59130 Aquamarine 59131 Lagoon



69117 Opal Green 69119 Hunter 69118 Torbernit 69140 Forest 69120 Midnight Jade

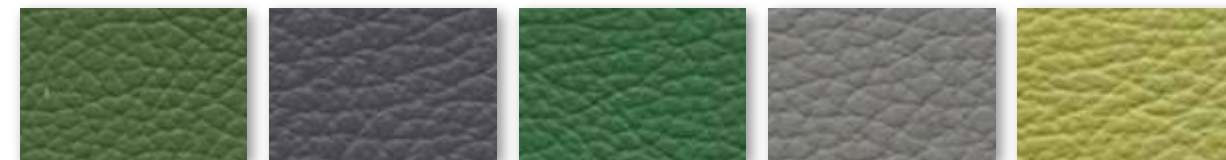

69130 Laurel 79164 Pewter 69121 Apple 79134 Slate 69200 Pistachio




29130 Yellow 89111 Saddle Brown 29176 Sun 39177 Orange 89180 Gold



29160 Sahara 29110 Khaki 19161 Ivory 19171 Beige 39120 Mandarine



39179 Aubergine 39114 Ruby Red 49116 Fuchsia 39137 Cherry 39165 Raspberry

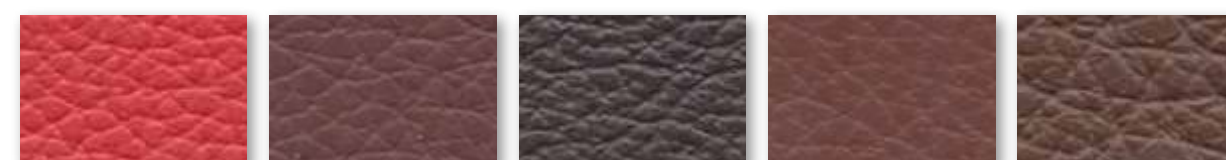

39178 Fire 49115 Chocolate 89116 Terra 89170 Mahogany 89135 Chestnut



89133 Tobacco 89139 Walnut 39113 Auburn 89112 Cinnamon 39168 Coral



39175 Rust 89174 Mud 79173 Reed 79162 Gravel 19130 Light Grey



19167 Clay 19124 Arctic 19163 Smoked Oyster 19172 Snow 19160 Stone



19120 White

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au








ROYAL EMOTIONS RANGE

The Royal Emotions range are a sophisticated embossed style leather which can be worked together with the Royal Aviator range of 57 colours that we have available. These are basically embossed prints of which we are able to do a minimum of one hide which is cut in half so we can supply two half hides as a minimum.

This can be produced in conjunction with plain colours so can be used for trims and conforms to all of the requirements for FAR, Aviation, After Market for Automotive, IMO 652 for the Marine or for general upholstery work for Commercial and Residential.

Royal Emotions is available in 19 exotic prints and in 57 different colours. Certification is available with each delivery if required.

Specifications

-  **Type:** Natural Grain Embossed Bovine
-  **Finish:** Semi Aniline
-  **Origin:** European
-  **Size:** Average 5.3 sq. metres
-  **Thickness:** 1.3 / 1.4mm
-  **Application:** Aviation, Commercial & Domestic, Automotive, Marine & Residential
-  **Certification:** FAR 25.853 Certified

SYDNEY HEAD OFFICE
707 Elizabeth Street
Waterloo, NSW 2017
P: +61 2 9319 2900
F: +61 2 9698 4747
E: nswl@leatherco.com.au

MELBOURNE OFFICE
107-109 Sackville Street
Collingwood, VIC 3066
P: +61 3 9417 3466
F: +61 3 9416 1514
E: nswlmel@leatherco.com.au

Technical data article: Royal Emotions

Technical Properties

Description	Method	Minimum Value
Colour Fastness to rubbing Dry 1000 Cycles, Wet 500 Cycles, Perspiration (ISO11641) 100 Cycles Evaluation ISO 105 A - 03	ISO 11640	> = 4 > = 4 > = 4
Colour Fastness to light Exposure Conditions N 3 (table 3) apparatus Type C (Atlas CI 3000+), Irradiance 1.2 W.m ² at 420nm, Exposure Method 3, 1 Exposure 80 hours (345 KJ/m ² at 420nm)	ISO 105 B-06	> = 6
Cold Crack Resistance of Finish (@ 30°C)	ISO 17233	No Cracks
Finish Adhesion	ISO 11644	> = 5 N/Cm (Dry) > = 3 N/Cm (Wet)
Burning Behaviour	ISO 3795	< = 75mm/min
Flexing Endurance	ISO 5402	100,000 Cycles
Tear Strength	ISO 3377-1	> = 30 N
Fogging Test Gravimetric Method, point 8.5.3	ISO 6452	< = 5 mg
Migration Staining	ISO 15701	> = 4
Tensile Strength and Elongation	ISO 3376	> = 12 N/mm ² 35 - 60%
Colour fastness to water spotting	ISO 15700	Passed
Abrasion Wheels CS 10, Load 500g	ISO 5470	2,000 Cycles
Artificial Ageing 168 hours, 38°C 98% RH 168 hours, 93°C	-	> = 4/5 > = 4/5
Dry Heat Shrinkage 168 hours, 93°C	-	< = 5%
Care Instructions	<ul style="list-style-type: none"> > Vacuum regularly with soft brush > Use a damp white cloth that is colourfast and wipe regularly > Do not use detergents, solvents, abrasives > Protect from direct sunlight and heat sources > Avoid sharp objects 	

ROYAL EMOTIONS



Blackpool A



Brighton A



Manchester C




Norfolk C




Bristol C




Cornwall D

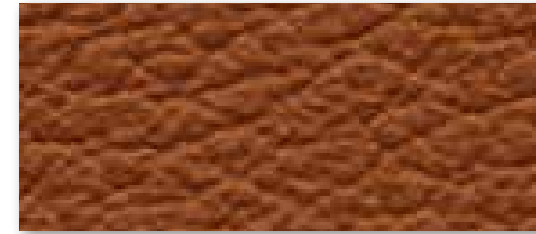


Plymouth C

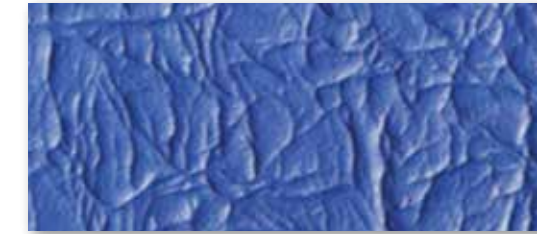

Suffolk A

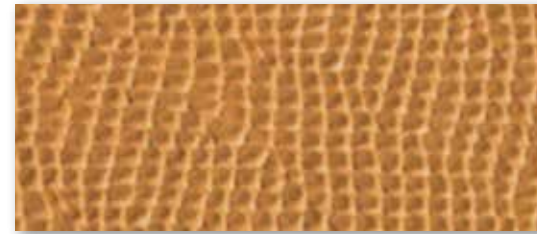

Darlington A

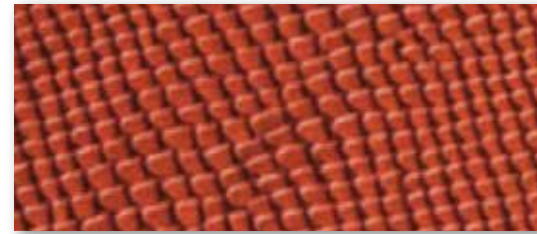

Derby C




Sussex C



Torbay C



Dorset D

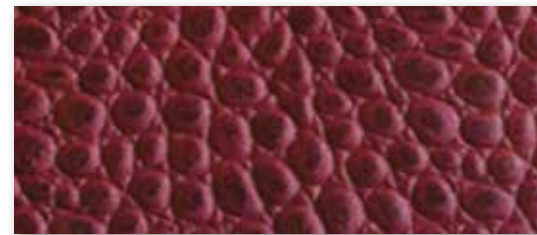

Essex C



Windsor C



York C



Kent C



London A



Yorkshire C